

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

Strength graded structural timber with rectangular cross section

according to the product specification listed in the current addendum to this certificate placed on the market

Company

PFEIFER HOLZ GMBH & CO KG

Luna 88

AT-6250 Kundl

and produced in the manufacturing plant

AT-6250 Kundl, Luna 88

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard

EN 14081-1:2005+A1:2011

under system 2+ are applied and that the factory production control is assessed to be in conformity with the applicable requirements.

CERTIFICATE OF CONFORMITY OF THE FACTORY PRODUCTION CONTROL


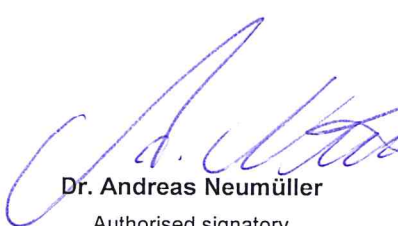
Certificate number: 1359-CPR-0789

Date of first issue: 11.04.2019


Date of issuance: 11.04.2019

This certificate will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

For the validity of this certificate see www.holzforschung.at.



Dr. Andreas Neumüller
Authorised signatory



Dr. Manfred Brandstätter
Head of the Certification Body

Addendum to certificate 1359-CPR-0789

Date of issuance: 11.04.2019

Scope of certification:

Machine strength graded structural timber according to ITT-Reports

L-classes

Wood species	Origin	Grading standard	Size
PCAB – Picea abies, Spruce	DE	L 17	thickness: 26 - 66 mm
ABAL – Abies alba, Fir	AT	L 25	width: 63 - 319 mm
	CZ	L 27	
	CH	L 30	
	FI	L 36	
	NO	L 40	
	SE		
	EE		
	LV		
	PL		
	RU		

Strength graded laminations for structural applications according to the classification based on test reports

Wood species	Origin	Grading standard	Grading classes	Strength classes according to EN 14080
PCAB – Picea abies Spruce	MNO	ÖNORM DIN 4074-1, Tab.3	S7, S10, S13	T11, T14, T 21
ABAL – Abies alba Fir	MNO	ÖNORM DIN 4074-1, Tab.3	S7, S10, S13	T11, T14, T 21

Additional mandated performances

Fire behaviour:

D-s2, d0

Durability (without wood preservative treatment):

according to EN 350-2